

# Again-CRETORS scores a first with the new and exclusive automatic

## MOTORIZED TRANSFER PUMP FOR POPPING OIL MODEL T50P

Once again, CRETORS proves its leadership in the industry—with this exclusive development to save you time and work and to increase your profits.

The T50P brings you every feature of the famous CRETORS Model "85"—standard of the industry for many years—PLUS *Motorized Transfer*.

The motor does all the work! No hand pumping! Just push the switch and the liquid coconut oil is transferred to the seasoning drawer of your popcorn machine—or to any container—fast and without waste. The unit is completely self-draining. The thermostatically controlled heating element melts a pail of coconut oil in record time.

The T50P is quality-engineered-and-built by CRETORS — to serve you efficiently for many, many years.

~~\$80.00~~

F.O.B. CHICAGO FACTORY

The MODEL T50P fits any standard 50 pound pail of popping oil

# CRETORS & company

POPCORN BUILDING, NASHVILLE, TENNESSEE 37202 U.S.A.

LEADERSHIP SINCE 1885

FACTORY: CHICAGO, ILLINOIS

# CRETORS SHOKLESS

MODEL "85"

COCONUT OIL HEATER & DISPENSER

The "85" has been the standard of the industry for years—and is still the standard where motorized transfer is not desired.

**IT SAVES TIME.** The heating element will penetrate solid Coconut Oil in about ten minutes and will immediately dispense oil at 140° to 160° F. In about 45 minutes all the solid will be liquid, and the thermostat will maintain an oil temperature of 160° F.

**IT SAVES MONEY.** There is no wasted oil! The dispenser effectively transfers oil from the pail to the seasoning drawer or to any container. The oil can be accurately measured, eliminating waste and assuring uniform seasoning of each batch. The SHOKLESS "85" will pay for itself in oil savings alone.

**IT IS QUALITY-BUILT.** The SHOKLESS "85" is built to the high CRETORS standards. The pump is entirely aluminum to comply with sanitation codes. The stainless steel ball valves will never wear out. Neoprene and Tygon are used throughout. The pump dispenses five ounces of liquid oil each operation. The Underwriters' Laboratory approved thermostat is rated at 13 amperes, 115 volts, good for 250,000 cycles. The heating element is wound with the best grade of chrome-nickel wire, magnesium-oxide filled, and housed in heavily nickel-plated copper sheathing. The thermostat tube is also of copper, heavily nickel-plated. Constructed largely of aluminum, the entire unit weighs only 4 pounds net, 7 pounds packed for shipment.

~~\$65.00~~


F.O.B. TOLEDO, OHIO



# CRETORS SHOKLESS

"150"

COCONUT OIL HEATER

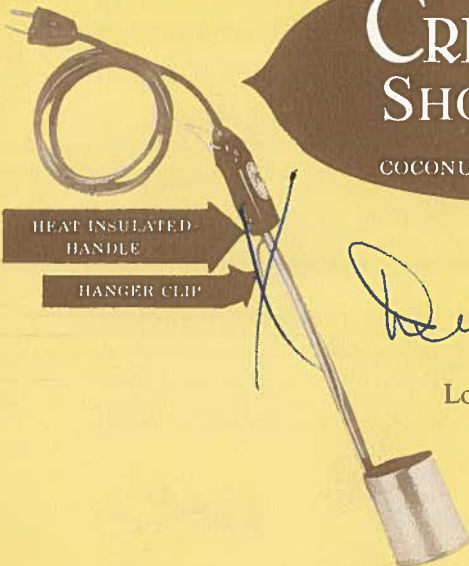

HEAT INSULATED  
HANDLE

HANGER CLIP

*Discontinued*

Low in cost, but highly efficient. Plugs into any 115 volt AC or DC outlet—150 watts. Hang the heater over edge of the pail. You'll be able to pour the required amounts of oil in 10 minutes. Completely sealed against

~~\$8.95~~

F.O.B. TOLEDO, OHIO

DISTRIBUTED BY: